

**CyberPower****UT SERIES**

UT1100EG/UT1100EIG

**ENERGY-SAVING TOWER UPS**Line-interactive  
UPS TopologyEnergy Saving  
TechnologyAutomatic Voltage  
Regulation (AVR)1Gbps  
High-Speed Data  
TransmissionLED Status  
IndicatorPowerPanel®  
Management  
Software**Energy-saving UPS systems save up to 93% of power consumption**


Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.

**SERIES FEATURES**


- Line-interactive UPS Topology
- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LED Status Indicator
- Overload Protection
- Phone/Fax/Modem/DSL/Network Protection
- High-speed Ethernet Data Transmission
- USB Connectivity Port
- PowerPanel® Management Software
- Configurable Alarm
- EMI and RFI Filtration

**PRODUCT CALLOUTS**

1. Power On/Off Switch
2. LED Status Indicators
3. USB Port
4. Battery Backup Outlets
5. Input Circuit Breaker
6. Communication Protection Ports  
RJ11/RJ45
7. AC Input Power Cord

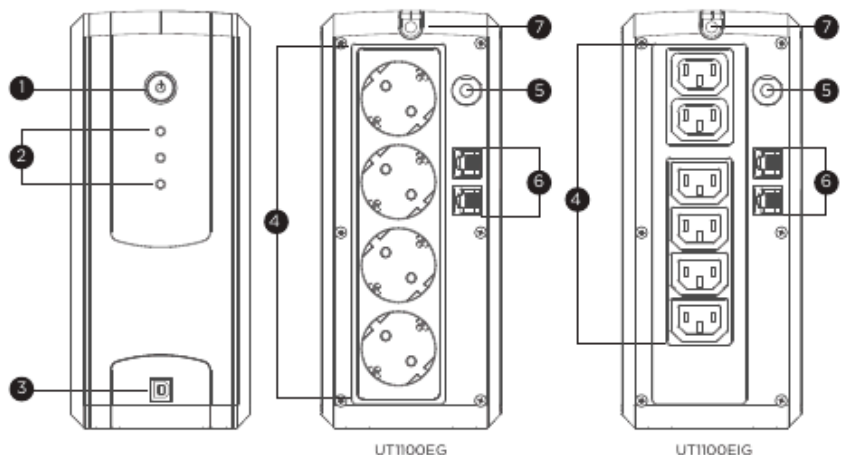

## UT1100EG/UT1100EIG

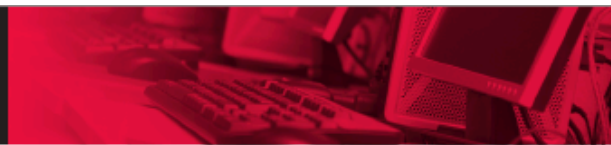

## TECHNICAL SPECIFICATIONS

| Model Name                                       | UT1100EG                                                                         |                | UT1100EIG |
|--------------------------------------------------|----------------------------------------------------------------------------------|----------------|-----------|
| General                                          |                                                                                  |                |           |
| UPS Topology                                     | Line-interactive                                                                 |                |           |
| Energy Saving Technology                         | GreenPower UPS™ Bypass Technology                                                |                |           |
| Input                                            |                                                                                  |                |           |
| Generator Compatibility                          | Yes                                                                              |                |           |
| Nominal Input Voltage (Vac)                      | 230 ± 10%                                                                        |                |           |
| Input Voltage Range (Vac)                        | 165 - 290                                                                        |                |           |
| Input Frequency (Hz)                             | 50 ± 5, 60 ± 5                                                                   |                |           |
| Input Frequency Detection                        | Auto-sensing                                                                     |                |           |
| Rated Input Current (A)                          | 4.56                                                                             |                |           |
| Input Connector Type                             | Schuko                                                                           |                |           |
| Output                                           |                                                                                  |                |           |
| Capacity (VA)                                    | 1100                                                                             |                |           |
| Capacity (Watts)                                 | 660                                                                              |                |           |
| On Battery Waveform                              | Simulated Sine Wave                                                              |                |           |
| On Battery Voltage(s) (Vac)                      | 230 ± 10%                                                                        |                |           |
| On Battery Frequency (Hz)                        | 50 ± 1%, 60 ± 1%                                                                 |                |           |
| Automatic Voltage Regulation (AVR)               | Single Boost, Single Buck                                                        |                |           |
| Overload Protection                              | Circuit Breaker                                                                  |                |           |
| Outlet(s) - Total                                | 4                                                                                | 6              |           |
| Outlet Type                                      | Schuko x 4                                                                       | IEC C13 x 6    |           |
| Outlet(s) - Battery Backup                       | 4                                                                                | 6              |           |
| Typical Transfer Time (ms)                       | 4                                                                                |                |           |
| Battery                                          |                                                                                  |                |           |
| Runtime at 60W (min)                             | 65                                                                               |                |           |
| Runtime at 90W (min)                             | 45                                                                               |                |           |
| Runtime at 200W (min)                            | 14                                                                               |                |           |
| Typical Recharge Time (Hours)                    | 6                                                                                |                |           |
| User-replaceable                                 | No                                                                               |                |           |
| Battery Type                                     | Sealed Lead-acid                                                                 |                |           |
| Replacement Battery Pack                         | RBP0119                                                                          |                |           |
| RBP Quantity (pcs)                               | 2                                                                                |                |           |
| Surge Protection & Filtering                     |                                                                                  |                |           |
| EMI/RFI Filtration                               | Yes                                                                              |                |           |
| Phone/Network Protection RJ11/RJ45 (Combo)       | 1-in, 1-out                                                                      |                |           |
| Management & Communications                      |                                                                                  |                |           |
| LED Indicators                                   | Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault |                |           |
| HID Compliant USB Port(s)                        | 1                                                                                |                |           |
| Audible Alarms                                   | Battery Mode, Low Battery, Overload, UPS Fault                                   |                |           |
| Ethernet Data Transmission Speed                 | Up to 1Gbps                                                                      |                |           |
| Power Management Software                        | PowerPanel® Personal (Recommended)                                               |                |           |
| Physical                                         |                                                                                  |                |           |
| Form Factor                                      | Tower                                                                            |                |           |
| Physical Size - UPS Module                       |                                                                                  |                |           |
| Dimensions (WxHxD) (mm.)                         | 95 x 220 x 307                                                                   | 94 x 220 x 307 |           |
| Weight (kg.)                                     | 6.9                                                                              |                |           |
| Environmental                                    |                                                                                  |                |           |
| Operating Temperature (°C)                       | 0 - 40                                                                           |                |           |
| Operating Relative Humidity (Non-condensing) (%) | 0 - 90                                                                           |                |           |
| Online Thermal Dissipation (BTU/hr)              | 27                                                                               |                |           |
| Certifications                                   |                                                                                  |                |           |
| Certifications*                                  | CE, EAC                                                                          |                |           |
| RoHS                                             | Yes                                                                              |                |           |

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
 #All specifications are subject to change without notice.

