

CyberPower**UT SERIES**

UT1500EIG/UT2200EIG

**ENERGY-SAVING TOWER UPS**Line-interactive
UPS TopologyEnergy Saving
TechnologyAutomatic Voltage
Regulation (AVR)1Gbps
High-speed Data
TransmissionLED Status
IndicatorPowerPanel
Management
Software**Energy-saving UPS systems help to save power consumption**


Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.

SERIES FEATURES

- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LED Status Indicator
- USB Charging Port(s)
- Overload Protection
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- High-speed Ethernet Data Transmission
- USB Connectivity Port
- PowerPanel Management Software
- Configurable Alarm
- EMI and RFI Filtration


PRODUCT CALLOUTS

- 1 . Power On/Off Switch
- 2 . LED Status Indicators
- 3 . USB Charging Port
- 4 . Battery Backup & Surge Protected Outlets
- 5 . Communication Protection Ports RJ11/RJ45
- 6 . Input Circuit Breaker
- 7 . AC Input Power Cord
- 8 . USB Port

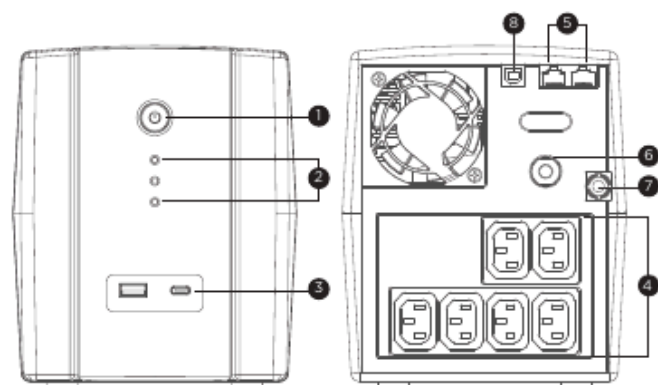

UT1500/2200EIG

UT1500EIG/UT2200EIG

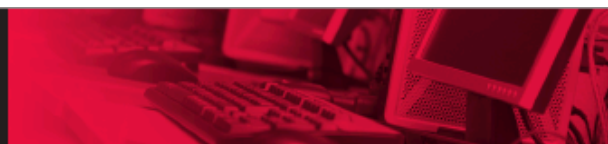

TECHNICAL SPECIFICATIONS

Model Name	UT1500EIG		UT2200EIG
General			
UPS Topology	Line-interactive		
Energy Saving Technology	GreenPower UPS™ Bypass Technology		
Input			
Generator Compatibility	Yes		
Nominal Input Voltage (Vac)	220/230/240		
Input Voltage Range (Vac)	167 ~ 295		
Input Frequency (Hz)	50, 60		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	6.52	10	
Input Connector Type	UK		
Output			
Capacity (VA)	1500	2200	
Capacity (Watts)	900	1320	
On Battery Waveform	Simulated Sine Wave		
On Battery Voltage(s) (Vac)	230 ± 10%		
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%		
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck		
Overload Protection	Internal Current Limiting, Circuit Breaker		
Outlet(s) - Total	6		
Outlet Type	IEC C13 x 6		
Outlet(s) - Battery & Surge Protected	6		
Typical Transfer Time (ms)	4		
USB Charging Port(s)	USB-A x 1, USB-C x 1		
USB Charging Current	5V/2.1A		
Battery			
Runtime at 60W (min)	90	95	
Runtime at 90W (min)	60	70	
Runtime at 200W (min)	27	34	
Typical Recharge Time (Hours)	8		
User-replaceable	No		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack (RBP)	RBP0089	RBP0090	
Replacement Battery Pack (RBP) Quantity (pcs)	2		
Surge Protection & Filtering			
Surge Suppression (Joules)	150		
EMI/RFI Filtration	Yes		
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out		
Management & Communications			
LED Indicators	Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault		
HID Compliant USB Port(s)	1		
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault		
Ethernet Data Transmission Speed	Up to 1Gbps		
Power Management Software	PowerPanel Personal (Recommended)		
Physical			
Form Factor	Tower		
Physical Size - UPS Module			
Dimensions (WxHxD) (mm.)	148 x 178 x 298		
Weight (kg.)	9.1	10.8	
Environmental			
Operating Temperature (°C)	0 ~ 40		
Operating Relative Humidity (Non-condensing) (%)	0 ~ 90		
Online Thermal Dissipation (BTU/hr)	34.1		
Certifications			
RoHS	Yes		

#All specifications are subject to change without notice.

CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.

